


PSC Controller



- Digital Display Design for pulse dust collectors.
- Extremely short time to make the action, saving energy and protecting the filter bag.
- Easy for installation and operation.
- The number of ON. OFF. STEP can be set up freely in the range.
- After shutdown, the filter bag can be cleaned 1 ~ 25 times (free set) to ensure filter bag life.

| Type | PSC06 | PSC10 | PSC20 |
|--|-------------------------|---------|---------|
| Sequences Steps | 1-6 | 1-10 | 1-20 |
| Power | AC 24V~265V. DC 24V~60V | | |
| Fuse | 0.5A 250V | | |
| Pulse Frequency Range Of Adjustability | 0.01 ~ 9.99 sec. | | |
| Pulse Duration Range of Adjustability | 1 ~ 999 sec. | | |
| Operating Temp. Range | -10~50°C | | |
| Current Max. | 5 A | | |
| HIPOT | 1000 V | | |
| Outline Dimension mm | 104×170 | 117×220 | 173×220 |
| Fixed Hole Dimension mm | Ø 4.5 | | |
| NET WEIGHT g | 230 | 320 | 520 |
| Hole to Hole Dimension mm | 92×160 | 107×209 | 162×209 |

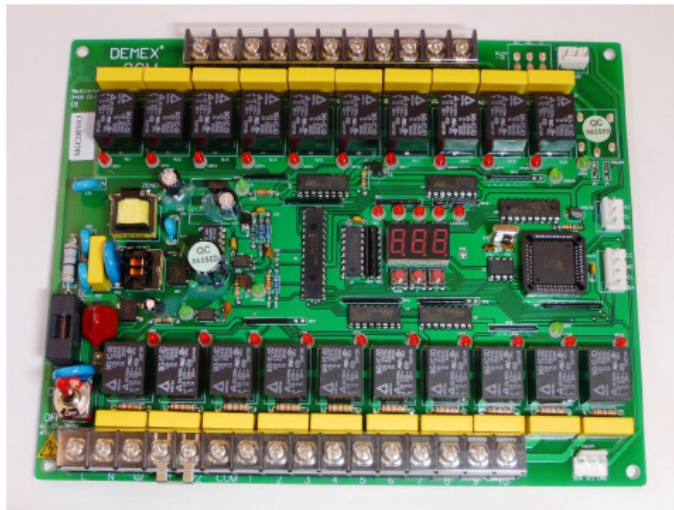