


Media : air – water – gas – light oil
 Pressure range : 2 to 10 bar max
 Media temperature : 100° C max
 Ambient temperature : -10° to +60° C max
 Media viscosity : 40 centistokes max
 Mounting : any position
 Weight (including coil) : 365g

3/2 Aluminium

N/CLOSED & N/OPEN 3 WAY SERVO ASSISTED

TYPE PU315/310



PRESSURE

	Port Ø	Ø Orifice (mm)	Flow Rate		Pressure Rating (bar)			Seals	Max Media Temp °C	Part Number	List Price
			Kv M³ Hr	Cv Ltr/ min	min	Max diff.	Max Working				
N/C	3/8 BSP	3.9	0.35	5.8	2	7	10	NBR	60	PU31503A + voltage	£41.00
N/O	3/8 BSP	3.9	0.35	5.8	2	7	10	NBR	60	PU31003A + voltage	

OPTIONS

Connector PG9 – DIN 43650 A IP65 Coil NPT Thread Explosion Proof Coil : EExmII T4 ATEX II G IP65 T 130°C	Included Included +10% +£50.55
---	---------------------------------------

ELECTRICAL DATA

Voltage (-10% + 15%) Continuous duty 100%	Coil Size	Power		Insulation class	Enclosure	Electrical connections
		Inrush	Holding			
~ 24 - 110 - 220 (50 or 60 Hz)	22001	7.6VA	6VA	F 155°C	IP 65 with connector	3 spades DIN 43650 DIN 40050 VDE 0110
= 12 - 24 - 48		4.5 Watts				


CONSTRUCTION

Body : Anodised Aluminium
 Tube and internal parts : Stainless steel
 Seals and gaskets : NBR
 Moulded coil : Resin

REPAIR KIT

Coil	Coil size (22001) + voltage
Complete plunger + O' rings	22001 + seal material

OVERALL DIMENSIONS

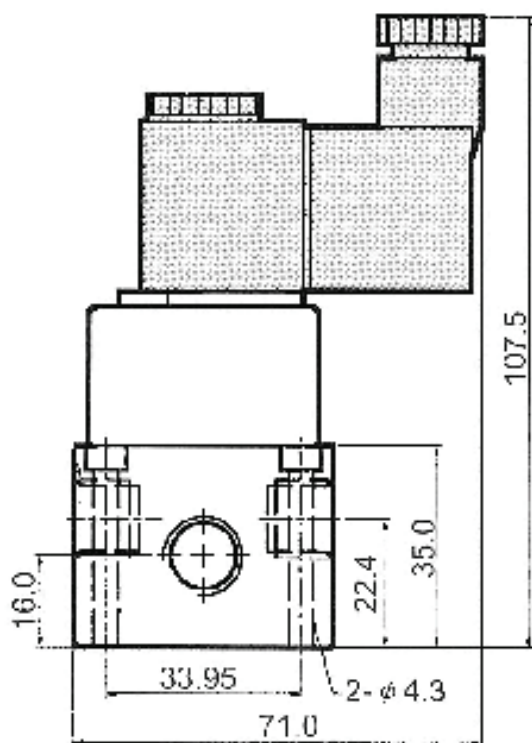

3/2 Manifold
Page 14



3/2 Valves
Page 14