

Media: air - vacuum
 Pressure range: 0 to 9 Bar max
 Media temp: -10°C +60°C max
 Ambient temperature: -10°C to +60°C
 Mounting: any position

5/2 Hand Control


1/8 1/4 3/8 1/2

Mechanical Lever Valves

5 WAY DIRECT ACTING

0 – 9 Bar

TYPE TSV8652

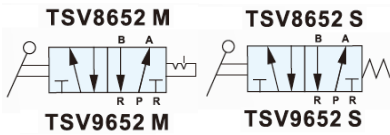

PRESSURE

Ø Port BSP	Ø Orifice (mm²)	Pressure Rating (Bar)		Mounting	Valve type	Picture	Part Number			
		Min	Max							
1/8	18mm²	0	9	Standard	Spring Return		TSV8652-01S			
1/4							TSV8652-02S			
3/8							TSV8652-03S			
1/2							TSV8652-04S			
1/8	18mm²				0	9	Standard	Detent		TSV8652-01M
1/4										TSV8652-02M
3/8										TSV8652-03M
1/2										TSV8652-04M
1/8 (01)	18mm²	0	9	Manifold Type (R)	Spring Return		TSV8652R + port + S			
1/4 (02)					Detent		TSV8652R + port + M			

OPTIONS

Panel mounting ring M22x1.5 (TSV9652-02M&S, 8652-01-02MS+F) only
 NPT Thread (TSV +port +N)
 Mounting bracket (F) (TSV8652 1/8 & 1/4 only)

Included

CONSTRUCTION

Body : Aluminium alloy, internal parts : Stainless steel, Seals and gaskets : NBR, Test pressure: 10 Bar

OVERALL DIMENSIONS

TSV8652-01,02M(S)

TSV8652-03M(S)

TSV8652-04M(S)

TSV8652R-01,02

TSV8652-01,02MF

MF520-0202

Number of station (N)	2	3	4	5	6	7	8	9	10
L1	67	94	121	148	175	202	229	256	283
L2	81	108	135	162	189	216	243	270	297