




2/2 Way N.C. Pilot Diap. Series

Opening: 200~400ms Closing:1000~3000ms



AMBIENT TEMP. -15°C~50°C(No Freezing)

Coil No.	#4	#5
AC(VA)	18.0	-
Final Temp. °C	88.0	-
DC(W)	-	18.5
Final Temp. °C	-	109.0


SEAL TEMP. °C

Coil No.	#4	#5
N:NBR	4~60	
J:EPDM		
V:FKM		

PK SPECIFICATIONS PA Nylon Plastic body, zero pressure N.C., for Water · Air

CODE (PIPE)	Orifice mm	Seal	COIL	Max. O. P. D. (Min. 0~ bar)		CV
				#4	#5	
				AC	DC	
10(3/8")	18	N、J、V	#4	7.0	2.0	4.0
15(1/2")						9.8
20(3/4")	28	J、V	#5	7.0	2.0	11.0
25(1")						9.8

TYPE INDICATION(□ means standard)

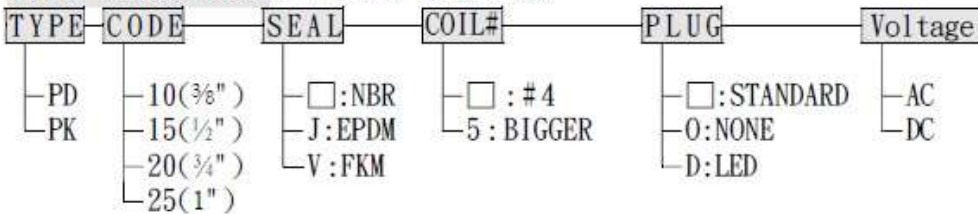

Examples

PK25-V-5-D-DC24V
TYPE PK · 1" PIPE · FKM SEAL · Nass #5 COIL · LED Plug · DC24V

DIMENSIONS/WEIGHT

TYPE	Size:mm							NET WEIGHT:kg	
	L	W	H	C	D	E	Ø	#4	#5
10(3/8")	75	56	109	93	36	40	3.5	0.42	0.50
15(1/2")									
20(3/4")	92	76	121	98	-	-	-	0.63	0.71
25(1")								0.62	0.70

DIMENSIONED DRAWING



OPTION ACCESSORY Bracket (For PD/PK 10/15 Only)

