




2/2 Large Diaphragm Solenoid valve

Opening time:250-500ms Closing time:500-1000ms




Power Consumption	COIL#	#I7
	AC (VA)	35.0
	Final Temp. °C	90.0
	DC (W)	35.0
	Final Temp. °C	90.0
Ambient Temp. : -15°C~50°C (No Freezing)		

SEAL Temp. °C	#I7
N:NBR	-5~80
V:FKM	-5~145

ILK SPECIFICATIONS (N.C.) For Water, Air, Natural Gas, Vacuum etc.

CODE (PIPE)	Orifice mm	Body Material	SEAL	COIL	WORKING PRESSURE		Cv	Torr
					0~ bar			
					AC	DC		
65(2½")	80	Bronze	N	#I7	2		82	10
80(3")					1		97	
100(4")	100	Iron	V		1		170	

TYPE INDICATION

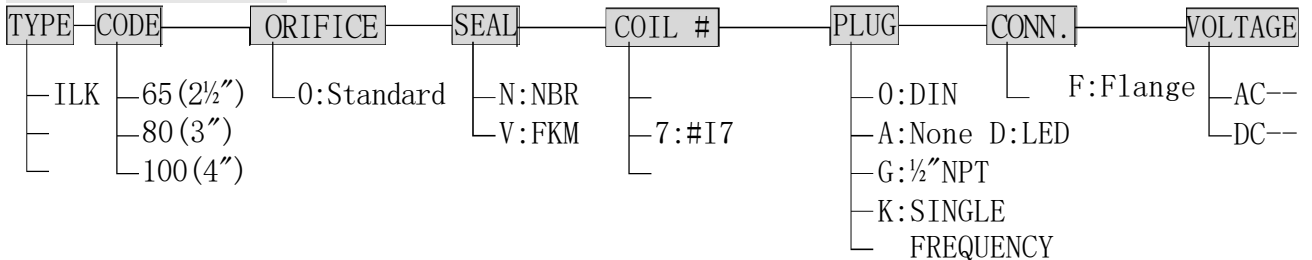

★AAA #I7 coil has no explosion-proof and no CE mark, AC coil is with rectified plug.

EXAMPLE: ILK100-0-V-K-0-F AC220V

TYPE ILK, 4" Flanged, Cast Iron Body, FKM Seal, Rectified Plug, AC220V.

DIMENSIONS/WEIGHT

TYPE	DIMENSIONS: mm			NET WEIGHT kg
	L	W	H	
ILK65/80	290	210	336	21
ILK100	340	270	391	36

