


Media: air – water – gas – light oil
 Pressure range: 0.5 to 15 Bar max
 Media temperature: -40°C +180°C max
 Ambient temperature: -20°C to +60°C
 Media viscosity: 50 centistokes max
 Mounting: coil upright
 Opening / Closing time: 50 mSec Max



2/2 Brass

3/8 – 3”

NORMALLY CLOSED

2 WAY SERVO ASSISTED

0.5 – 15 Bar

TYPE PU225®



PRESSURE

Ø Port BSP	Ø Orifice (mm)	Flow Kv Ltr/min	Coil	Pressure Rating (Bar) ΔP		Max Working	Max Media Temp. °C	Seals	Part Number
				Min	Max				
3/8	13	40.0	22003	0.5	10	15	NBR -15°C to +80°C	NBR	PU22503 + voltage
								FKM	PU22503V + voltage
								EPDM	PU22503E + voltage
1/2	13	40.0	22003	0.5	10	15	NBR -15°C to +80°C	NBR	PU22504A + voltage
								FKM	PU22504AV + voltage
								EPDM	PU22504AE + voltage
3/4	25	165.0	22003	0.5	10	15	VITON -10°C to +180°C	NBR	PU22506A + voltage
								FKM	PU22506AV + voltage
								EPDM	PU22506AE + voltage
1	25	165.0	22003	0.5	10	15	EPDM -5°C to +130°C	NBR	PU22508A + voltage
								FKM	PU22508AV + voltage
								EPDM	PU22508AE + voltage
1 1/4	38	367	22003	0.5	10	15	EPDM -5°C to +130°C	NBR	PU22512A + voltage
								FKM	PU22512AV + voltage
								EPDM	PU22512AE + voltage
1 1/2	38	500	22003	0.5	10	15	HNBR -40°C to +150°C	NBR	PU22514A + voltage
								FKM	PU22514AV + voltage
								EPDM	PU22514AE + voltage
2	50	600	22003	0.5	10	15	HNBR -40°C to +150°C	NBR	PU22520A + voltage
								FKM	PU22520AV + voltage
								EPDM	PU22520AE + voltage
2 1/2	65	1050	16W	0.3	10	15	HNBR -40°C to +150°C	NBR	PU22524A + voltage
								FKM	PU22524AV + voltage
								EPDM	PU22524AE + voltage
3	80	1380	16W	0.3	10	15	HNBR -40°C to +150°C	NBR	PU22528A + voltage
								FKM	PU22528AV + voltage
								EPDM	PU22528AE + voltage

OPTIONS

IP65 Coil & Connector PG9 – DIN 43650 A NPT Thread (Not available 2 1/2" & 3") ATEX 10 Watt EExmII T4 II 2G & 2D IP65 T130°C (sizes 3/8-2 only) ⚠ ATEX 8 Watt Ex db IIC T6/T5, Ex tb IIIC T80C/T95C Db IP66 / IP67 Aluminium M20x1.5mm (Horizontal) ⚠ IP68 8 Watt DC, 6 watt AC safe area coil aluminium housing M20x1.5mm (Vertical) 12vDC, 24vAC/DC or 230vAC/DC HNBR seals (Not 2 1/2 + 3") – same price as Viton + EPDM	Included
	<<See

ELECTRICAL DATA

Voltage (-10% + 10%) Continuous duty 100%	Coil	Power Consumption		Insulation class	Enclosure	Electrical connections
		Inrush	Holding			
~ 12-24-48-110-220-240-380 (50/60 Hz)	22003	23VA	17VA	H 180°C	IP 65 with connector	3 spades DIN 43650A DIN 40050 VDE 0110
= 12 - 24 - 48 -110- 220 (DC)		15 Watts				
~ 24-48-110-230 (50/60 Hz)	16W	25VA	15VA	F 155°C		
= 12 - 24 - 48 (DC)		16 Watts				



CONSTRUCTION

Body: Forged Brass SS41, Tube and internal parts: Stainless steel
 Seals and gaskets: NBR (Optional EPDM, FKM & HNBR)
 Moulded coil: 16 W Resin / 22003 DuroPlast ThermoSet Resin

REPAIR KIT

Seal kit	ZGPU225 + Size code (03-20) + seal material
Coil	Coil type (22003 or 16W) + voltage

OVERALL DIMENSIONS

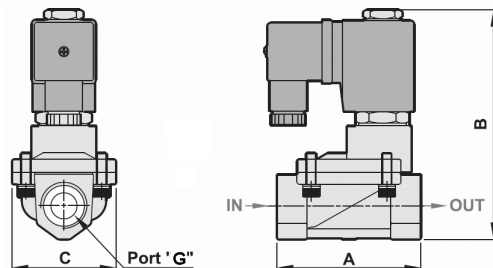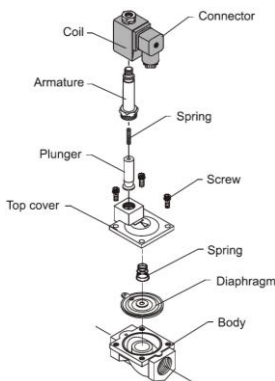

Port	A	B	C	Kg
3/8 1/2	66.5	106.5	48	0.725
3/4 1	96	126.5	70	1.565
1 1/4 1 1/2	131.5	145.5	96	2.56
2	160	160.5	112	3.9
2 1/2	245	186	184	9.5
3	250	196	184	11.23