


Media: air – water – light oil - steam
 Pressure range: 0.5 to 120 Bar max
 Media temperature: +180°C Max
 Ambient temp: -30°C to +60°C
 Media viscosity: 50 centistokes max
 Mounting: coil upright
 Opening / Closing 200 mSec Max



NC

2/2 Stainless

3/8 – 1/2

NORMALLY CLOSED

2 WAY SERVO ASSISTED

0.5 – 120 Bar

TYPE SASHHH



PRESSURE

Ø Port BSP	Ø Orifice (mm)	Flow Kv Ltr/ min	Pressure Rating (Bar) ΔP			Part Number
			Min	Max Steam	Max Air/ Water	
3/8	15	64.4	0.5	12	120	SAS14HHH + voltage
1/2	15	64.4	0.5	12	120	SAS15HHH + voltage

OPTIONS

IP67 (EN60529:1991+A1:2000) UL & CSA Approved Coil + IP65 LED Connector DIN 43650A
 Silver Shading Ring (AC or DC) or without shading ring (DC only)
 NPT Thread
 Other custom made options available upon request

Included

ELECTRICAL DATA

Voltage (-10% + 10%) Continuous duty 100%	Coil	Power Consumption		Insulation class	Enclosure	Electrical connections
		Inrush	Holding			
~ 24 - 110 - 230 (50 or 60 Hz)	WPG2	18.7VA	15.3VA	H 180°C	IP 65 With Connector	3 spades DIN 43650 DIN 40050 VDE0110
= 12 – 24 DC		18 Watts				


CONSTRUCTION

Body: 316 Stainless steel, Tube: 304 Stainless Steel Internal parts: 430F + 303 Stainless steel
 Seals and gaskets: PTFE, Moulded coil: Resin

REPAIR KIT

Coil	WPG2 + voltage
Piston	SP210 + valve part number

OVERALL DIMENSIONS

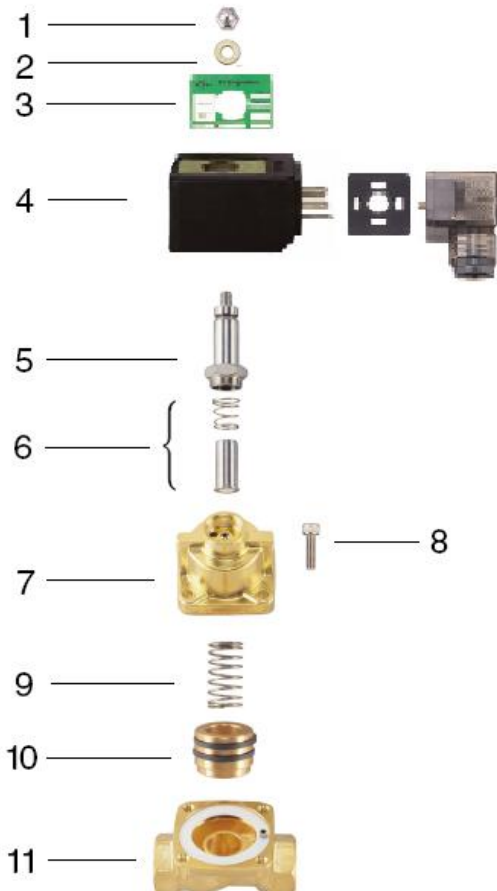

Model	A	B	C	D	E	F	G	H	Kg
SAS14	67	48	123	67	52	42	3/8	15	1.13
SAS15	67	48	123	67	52	42	1/2	15	1.1

