


Media: air - vacuum  
 Pressure range: 0 to 9 Bar max  
 Media temp: -10°C +60°C max  
 Ambient temperature: -10°C to +60°C  
 Mounting: any position

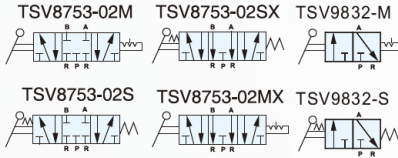

# 5/3 3/2 Hand Control

## 1/8 1/4 3/8 1/2

### Mechanical Lever Valves

#### 3+5 WAY DIRECT ACTING

#### 0 – 9 Bar

# TYPE TSV8753-9832



### PRESSURE

Ø Port	Ø Orifice (mm²)	Pressure Rating (Bar)		Function	Valve type	Picture	Part Number		
		Min	Max						
1/4	18mm²	0	9	5/3	Spring return		TSV8753-02S		
					Spring return exhaust centre		TSV8753-02SX		
Spring return	TSV8753-03S								
Spring return exhaust centre	TSV8753-03SX								
Spring return	TSV8753-04S								
Spring return exhaust centre	TSV8753-04SX								
3/8	35mm²				0	9	5/3		TSV8753-02M
1/2	38mm²								TSV8753-02MX
1/4	18mm²								TSV8753-03M
3/8	35mm²								TSV8753-03MX
1/2	38mm²	TSV8753-04M							
1/2	38mm²	TSV8753-04MX							
1/8 (01)	1/8 18mm²	0	9	3/2		TSV9832 + port + M			
	1/4 (02) 1/4 35mm²					TSV9832 + port + S			

### OPTIONS

NPT Thread (TSV +port +N)  
 Mounting bracket (F)

### CONSTRUCTION

Body : Aluminium alloy, Panel dimension 30mm, internal parts : Stainless steel, Seals and gaskets : NBR  
 Test pressure: 10 Bar

### OVERALL DIMENSIONS

